

Introduction

With the new LAV series, CCS combines diffused lightning with coaxial lightning in just one unit. Because each form of lightning can be controlled separately, this light can be adjusted according to its workpiece. The LAV is ideal for uniform lightning needed for glossy or curved workpieces.



Specifications

Model name	LED color
LAV-80RD2	Red
LAV-80SW2	White
LAV-80BL2	Blue
LAV-80GR2	Green


Illumination part	Power consumption
Coaxial illumination part	Red: 1.0 W White/Blue/Green: 1.6 W
Diffused illumination part	Red: 2.6 W White/Blue/Green: 3.4 W

If adjusting the intensity for each part separately, use a 2-channel Control Unit.


You can change the connectors of the LightUnit cable. Choose between M12 connectors and flying leads.

Measurements

LAV-80RD2/SW2/BL2/GR2

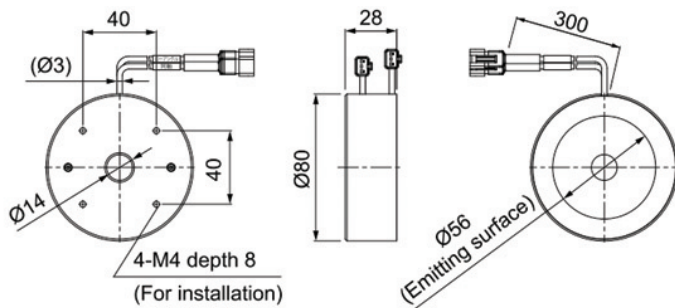

* The emitting surface for the LAV-80SW2 / BL2 / GR2 is Ø54.

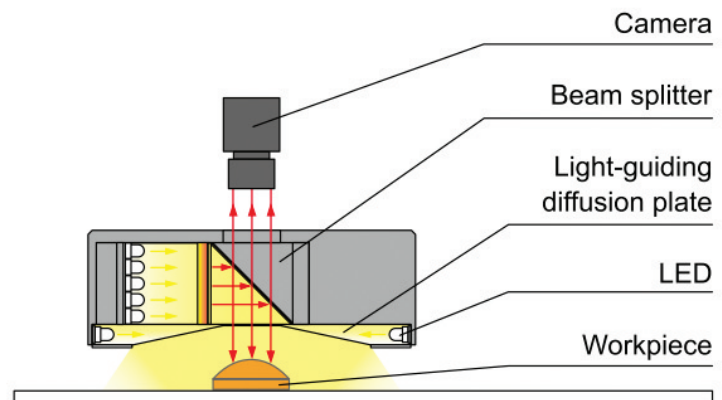

For further information, please contact CCS Europe NV at +32-2-333-0080, or send an e-mail to info@ccseu.com